



ZHEJIANG WELL SHINE INDUSTRY&TRADE CO.,LTD.
Address: Shentang Ind. Area, Wuyi(321200)Zhejiang, China
Tel. +86-579-87878787
Fax. +86-579-87969798
E-mail: mike@jskygroup.com



www.jskygroup.com



2024

ZHEJIANG WELL SHINE
INDUSTRY&TRADE CO.,LTD.





LITHIUM-ION SERIES
PAGE 07-18





QUALITY IS LIFE

INTRODUCTION

ZHEJIANG WELL SHINE INDUSTRY&TRADE CO.,LTD.

Zhejiang Well Shine Industry & Trade Co.Ltd., formerly knows as Zhejiang Jason sky Ind. Co.,Ltd, a privately owned company engaged in manufacturing and trading of Gasoline garden tools such as chainsaw,brushcutter,and hedge trimmers etc.Since 2006 all our products have obtained CE,GS,EMC certificate from TUV.And our gasoline brushcutter has EURO 2 (Will be EURO 5 by second half of 2018) in mass production.Factory's main markets are Europe,South America and South East Asia.

By integrating production, Design development, Trade and after sales service, we are able to provide satisfaction for our clients with a large selection Gasoline operated Garden tools.

Our factory which is situated in Wuyi, Zhejiang covers an area of 40,000 Sq. Meters and is equipped with modern machineries and production lines with the back up of our well experienced Research & Development Department and over 300 skilled workers.

Factory has ISO9001,ISO14001 ,ISO18001 system certificate,also passes BSCI audit routinely.

We strongly pursue the business principle, "Satisfying clients with quality, Winning markets through high technology and service". We are constantly expanding our presence in the domestic and international markets. If you are interested in any of our unique product styles, please contact us, we seek cooperation with customers from home and abroad.


For Us Efficiency

Ergonomics And Function Goes Without Saying.

The driving force behind our development of work is manufacturing garden tools that offers more than just efficiency, performance and ergonomics. In addition to the results of our work being perfect, our efficiency, design and response are the reasons why customers choose us.

As for the future, we will continue combining these ingredients with powerful, efficient engines that have rapid acceleration qualities and maximum control. Advanced management, professional machinery and strict QC system ensure best and stable quality.



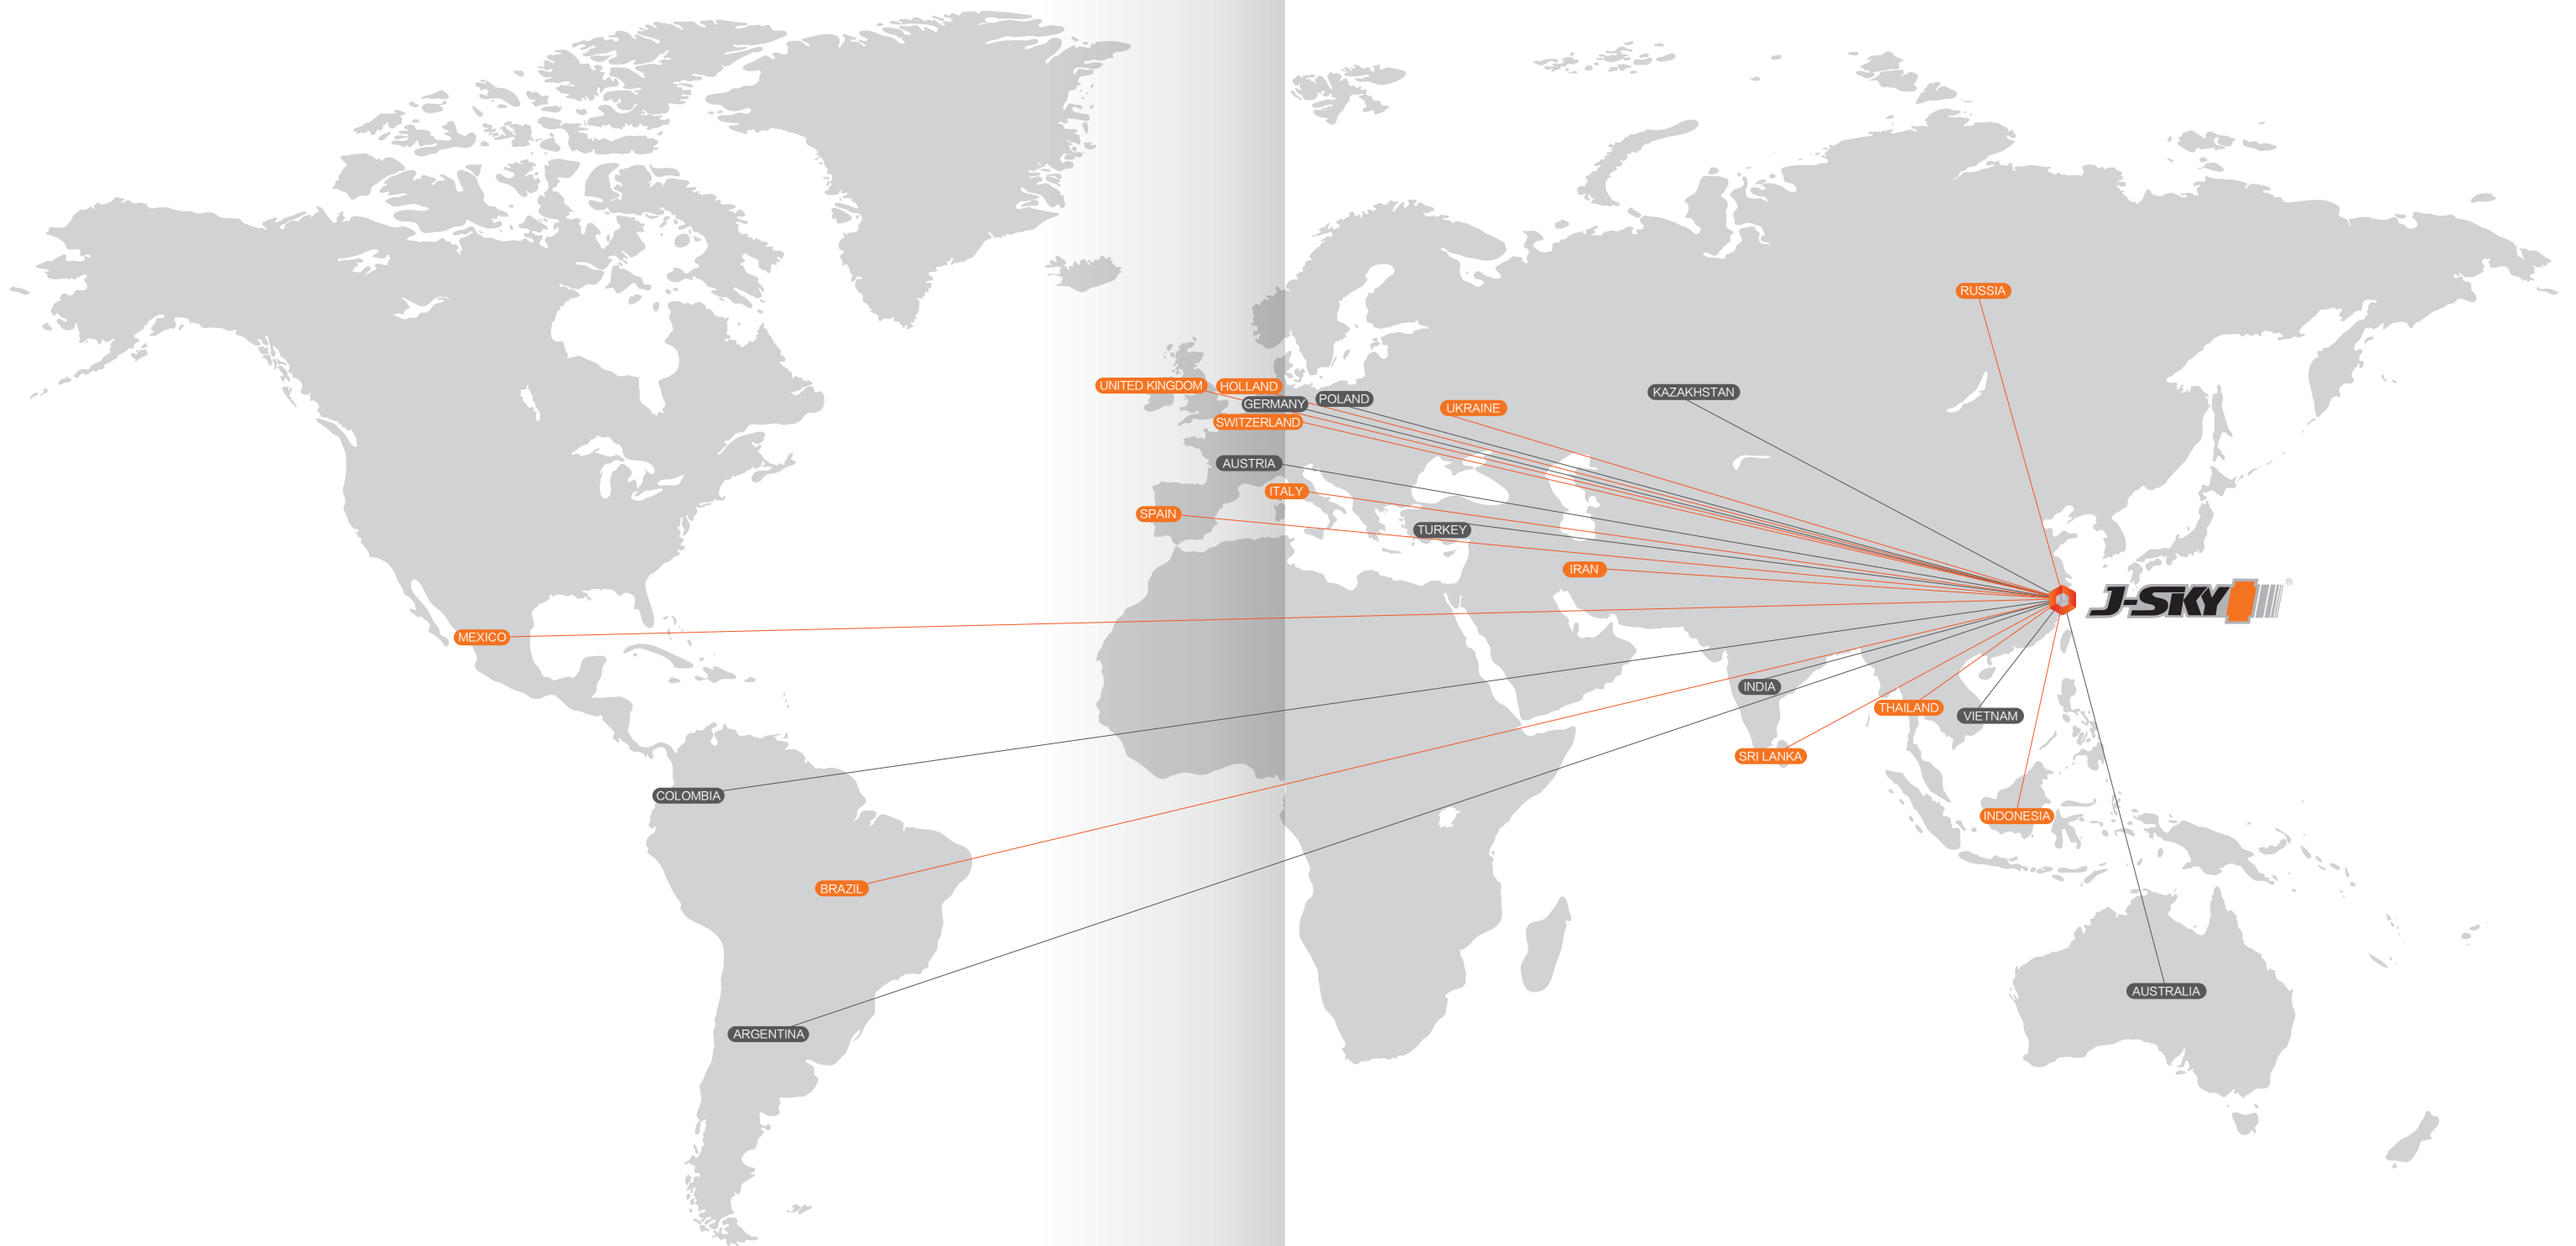

MARKET NETWORK

Sold to overseas markets: Southeast Asia, Europe, Middle East, Russia, South America, Australia, Africa.

Satisfying clients with quality, Winning markets though high technology and service
People are great because of dreams.

Lithium Brush Cutter

Light Weight, Easy To Handle

The performance of battery-driven products is comparable to gasoline-based products



40V LITHIUM PowerMax




Second gear speed 5500RPM
Third gear speed 6000RPM
Loading Qty (20GP/40GP/40HQ) 510/1050/1230Pcs



DL-MT4001

Rated Power 800W
Rated Voltage 40V d.c. (2*20V)
Maximum rotation speed 6000RPM
First gear speed 5000RPM

The dual battery for multiple tools for you to enjoy gardening in a way that is simple, intelligent and in complete harmony with nature.



Brushless Motor
• Powerful and efficient, long life




Silent and light weight
• make work more enjoyable.



Battery products are more economical



• Low maintenance cost



• Ergonomic design ,more comfortable for operator



DL-BC4001


Rated Power 800W
Rated Voltage 40V d.c. (2*20V)
Maximum rotation speed 6000RPM
First gear speed 5000RPM
Second gear speed 5500RPM
Third gear speed 6000RPM
Loading Qty (20GP/40GP/40HQ) 800/1610/1900Pcs



Lithium Brush Cutter

Light Weight, Easy To Handle

The performance of battery-driven products is comparable to gasoline-based products



- Brushless Motor
- Powerful and efficient, long life




- Silent and light weight
- make work more enjoyable.



- Battery products are more economical



- Low maintenance cost



- Ergonomic design ,more comfortable for operator



DL-BC4010

Voltage 20V+20
 Working Voltage Range 27V-42V
 Rated Power 900W (φ 50*30 adversion)
 Electric Quantity Display LED panel
 Speed 6000/500r/min
 Cutting diameter 350 mm
 Line style size 2*4m

Lithium Telescope Hedge Trimmer/ Pole Pruner

Light Weight, Easy To Handle



DL-PHT2001

Brush motor 300W
Rated Voltage 20V d.c.
Angle adjustment 150° (60° up, 90° down) / 15° / gear
Motor maximum speed 21400 RPM/20V 16500 RPM/18V
Total length of product 2.6–2.7m
Telescopic length 750mm
Aluminum tube length 980mm
Working speed 1400 spm
Material / process 65Mn/Laser cutting
Cutting width 410mm
Blade length 500mm
Tooth thickness 1.5mm
Tooth pitch / maximum cutting diameter 15mm / 12mm
Anti-self-locking function 150N 10S does not start
Handle vibration 1.8m / s²
Loading Qty (20GP/40GP/40HQ) 1580/3270/3840PCS



DL-PP2001

Brush motor 300W
Rated Voltage 20V d.c.
Angle adjustment 45° (down 45°) / 15° / gear
Total product length 2.6–2.7m
Telescopic length 750mm
Aluminum tube length 980mm
Guide bar&chain specification 8"AM08–33–507P/050 33E
Maximum motor speed 21400 RPM/20V 16500 RPM/18V
Ratio of teeth 60:7
Chain speed 5m/s
Anti-self-locking function 150N 10S no start
Vibration 2.5m/s²
Loading Qty (20GP/40GP/40HQ) 1230/2560/3000PCS




Silent and light weight
• make work more enjoyable.



Battery products are more economical



• Low maintenance cost




• Ergonomic design ,more comfortable for operator



Lithium Hedge Trimmer

Light Weight, Easy To Handle

The performance of battery-driven products is comparable to gasoline-based products

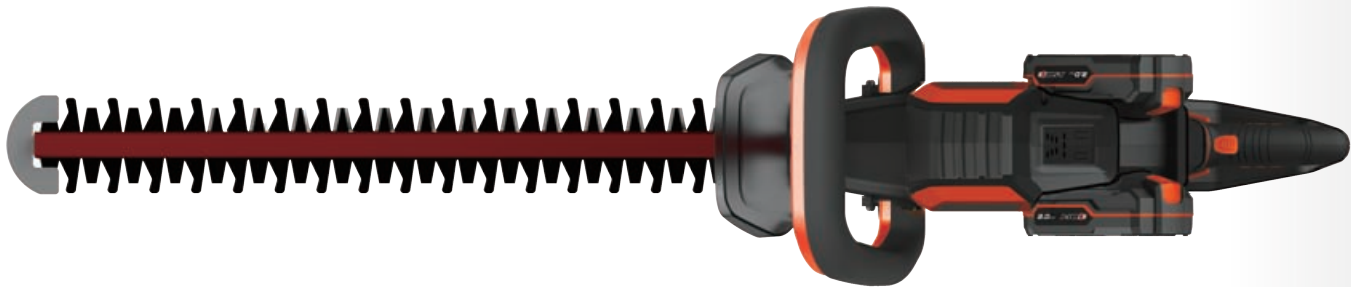

DL-HT4001

Rated Power 600W
Rated Voltage 40V d.c. (2*20V)
Stroke rate 1000,1200,1500 spm (electronic adjustable)
Motor speed 22000rpm
Blade length 600 mm
Teeth distance 24 mm
Noise 90 dB(a)
Loading Qty (20GP/40GP/40HQ) 480/990/1160Pcs



Brushless Motor
• Powerful and efficient, long life



Silent and light weight
• make work more enjoyable.




Laser cut blade, sharp edge, high precision



Battery products are more economical



Low maintenance cost



Ergonomic design ,more comfortable for operator



Lithium Blower

Light Weight, Easy To Handle



DL-AB4001

3 functions: Blowing, suction, shredding

Rated Power 800W
Rated Voltage 40V d.c. (2x 20V)
Max. Suction flow 160 L/s
Blowing speed 320 km/h (69m/s)
Catch bag volume 45L
Sound power level max. 102 dB(A)
Sound pressure level max. 91 dB(A)
Vibration emission level max. 2.8 m/s²
Max air speed 69m/s Air flow 780m³/h (with round nozzle)
Blow function runtime 2 Ah = 15 min and 4Ah = 30 min
Loading Qty (20GP/40GP/40HQ) 630/1310/1540Pcs



DL-AB4010

Voltage 20V+20
Working Voltage Range 27V-42V
Rated Power 600W(φ 38*20 abversion)
Speed 22000/18000/15000/10000r/min
Wind Speed 50/40/32/25m/s
Electric Quantity Display LED
panelLoading Qty (20GP/40GP/40HQ) 630/1310/1540Pcs



Lithium Chain Saw



DL-CS4010

Voltage 20V+20V
Working Voltage Range 27V-42V
Rated Power 1600W(φ 60*30 adversion)
Idle Speed 6000/4500r/min
Electric Quantity Display LED panel

chain & bar adjust way SDSChain
speed 13m/s
Bar 16"
Loading Qty (20GP/40GP/40HQ) 1290/2680/3140Pcs

OPTIONAL

OREGON



Brushless Motor
• Powerful and efficient, long life




Silent and light weight
• make work more enjoyable.



• Battery products are more economical



• Low maintenance cost



• Ergonomic design ,more comfortable for operator



DL-CS4001

Rated Power 1000W
Rated Voltage 40V d.c. (2*20V)
Battery Capacity 2Ah
Chain Speed 12m/s 15m/s 18m/s
Chain Brake Time <0.12S
Loading Qty (20GP/40GP/40HQ) 1290/2680/3140Pcs

With automatic oil system
With oil window
With weight incl. blade and chain<5kg



Brush Cutter

Greater Results With **J-SKY** Trimmers.


J-SKY brush cutters deliver high performance with low fuel consumption and low emissions, combined with outstanding ergonomics. They have high blade speeds and optimally designed bevel gears for directional felling in different stands.

Adjustable, anti vibration equipped handles enhance comfort and convenience during operation. **J-SKY** brush cutters, always offer advanced engine technology for you.



BC262

Matched Engine 1E34F-3EB
 Displacement(CC) 25.4
 Rated Power Output 0.75KW/1.02HP
 Form Of Carburetor BUTTERFLY VALVE
 Mixed Fuel Ratio FD 40:1
 Start assist system Easy Start
 Tank Capacity(L) 0.35
 Engine Working Life(H) 120
 Loading Qty (20GP/40GP/40HQ) 630/1310/1540PCS




- Starter with optional easy start function




- Thoughtfully designed to be lighter and compact



- Auto choke system for easy operation



- Combined engine cover and clutch case design to reduce weight



- Rubber damper reduce vibration for better comfort



- Elongated trigger design reduce fatigue for longer operations

J-SKY brush cutters are equipped with specially designed engines, characterized by high torque. Also equipped with self-lubricating bushes and ergonomic handles designed to provide maximum operator comfort, additional features such as the big clutch, steel drive shaft and two-ring piston make these machines a safe, trusty workmate.





BC New Series

Designed For Clearing Thick Grass, Shrubs And Undergrowth



BC262

Matched Engine 1E34F-3EB
 Displacement(CC) 25.4
 Rated Power Output 0.75KW/1.02HP
 Form Of Carburetor BUTTERFLY VALVE
 Mixed Fuel Ratio FD 40:1
 Start assist system Easy Start
 Tank Capacity(L) 0.35
 Engine Working Life(H) 120
 Loading Qty (20GP/40GP/40HQ) 630/1310/1540PCS

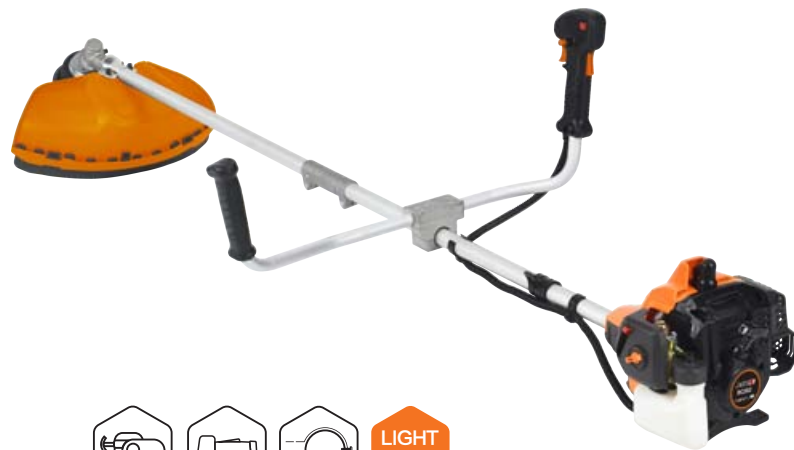

BC332

Matched Engine 1E36F-3EB
 Displacement(CC) 32.7
 Rated Power Output 0.90KW/1.2HP
 Form Of Carburetor BUTTERFLY VALVE
 Mixed Fuel Ratio FD 40:1
 Start assist system Easy Start
 Tank Capacity(L) 0.84
 Engine Working Life(H) 120
 Loading Qty (20GP/40GP/40HQ) 630/1310/1540PCS



BC432/522

Matched Engine 1E40F-5EB / 1E44F-5EB
 Displacement(CC) 42.7 / 51.7
 Rated Power Output 1.35KW/1.8HP / 1.45KW/2.0HP
 Form Of Carburetor BUTTERFLY VALVE / BUTTERFLY VALVE
 Mixed Fuel Ratio FD40:1 / FD40:1
 Start assist system Easy Start / Easy Start
 Tank Capacity(L) 1.16 / 1.16
 Engine Working Life(H) 120 / 120
 Loading Qty (20GP/40GP/40HQ) 630/1310/1540PCS / 630/1310/1540PCS



TU Series

Light Weight, Easy To Handle

Designed for users demanding a brush cutter with high performance in its class and superior operating comfort.



TU261

Matched Engine 1E34F-2E
 Displacement(CC) 25.4
 Rated Power Output 0.65KW/0.9HP
 Form Of Carburetor DIAPHRAGM
 Mixed Fuel Ratio FD 40:1
 Tank Capacity(L) 0.55
 Engine Working Life(H) 120/200
 Loading Qty (20GP/40GP/40HQ) 630/1310/1650PCS




TU331

Matched Engine 1E36F-2E
 Displacement(CC) 32.7
 Rated Power Output 0.90KW/1.2HP
 Form Of Carburetor DIAPHRAGM
 Mixed Fuel Ratio FD 40:1
 Tank Capacity(L) 0.84
 Engine Working Life(H) 120/200
 Loading Qty (20GP/40GP/40HQ) 630/1310/1540PCS



TU430/520

Matched Engine 1E40F-5 / 1E44F-5
 Displacement(CC) 42.7 / 51.7
 Rated Power Output 1.35KW/1.8HP / 1.45KW/2.0HP
 Form Of Carburetor DIAPHRAGM / DIAPHRAGM
 Mixed Fuel Ratio FD40:1 / FD40:1
 Tank Capacity(L) 1.16 / 1.16
 Engine Working Life(H) 120/200 | 120/200
 Loading Qty (20GP/40GP/40HQ) 630/1310/1540PCS / 630/1310/1540PCS




NB Series

Light Weight, Easy To Handle

J-SKY brush cutters deliver high performance with low fuel consumption and low emissions, combined with outstanding ergonomics. They have high blade speeds and optimally designed bevel gears for directional felling in different stands. Adjustable, anti vibration equipped handles enhance comfort and convenience during operation. **J-SKY** brush cutters, always offer advanced engine technology for you.




NEW
PRODUCT




- Starter with optional easy start function



- Fuel efficiency



- Ergonomically designed throttle grip with user in mind



- Innovative and stronger handle fixture to reduce vibration and weight

EURO 1

NB411

Matched Engine 1E40F-6
Displacement(CC) 40.2
Rated Power Output 1.4KW/1.9HP
Form Of Carburetor FLOAT TYPE
Mixed Fuel Ratio 25:1
Tank Capacity(L) 1.02
Engine Working Life(H) 120
Loading Qty (20GP/40GP/40HQ) 630/1310/1540PCS


BC Series

Designed For Clearing Thick Grass, Shrubs And Undergrowth

EURO 1

BC411


Matched Engine 1E40F-6
Displacement(CC) 40.2
Rated Power Output 1.4KW/1.9HP
Form Of Carburetor FLOAT TYPE
Mixed Fuel Ratio 25:1
Tank Capacity(L) 0.84
Engine Working Life(H) 120
Loading Qty (20GP/40GP/40HQ) 630/1310/1540PCS



EURO 1

BC411C


Matched Engine 1E40F-6
Displacement(CC) 40.2
Rated Power Output 1.4KW/1.9HP
Form Of Carburetor FLOAT TYPE
Mixed Fuel Ratio 25:1
Tank Capacity(L) 0.88
Engine Working Life(H) 120
Loading Qty (20GP/40GP/40HQ) 630/1310/1540PCS



CE EURO 1

BC431

Matched Engine 1E40F-5EB
Displacement(CC) 42.7
Rated Power Output 1.35KW/1.8HP
Form Of Carburetor BUTTERFLY VALVE
Mixed Fuel Ratio FD40:1
Start assist system Easy Start
Tank Capacity(L) 1.16
Engine Working Life(H) 120
Loading Qty (20GP/40GP/40HQ) 630/1310/1540PCS






Light weight, easy to handle , these brush cutters represent the best value in price and yet offer renowned **J-SKY** high quality and durability.




EURO 1

TB260

Matched Engine 1E34F
Displacement(CC) 25.4
Rated Power Output 0.65KW/0.9HP
Form Of Carburetor DIAPHRAGM
Mixed Fuel Ratio 25:1
Tank Capacity(L) 0.75
Engine Working Life(H) 120
Loading Qty (20GP/40GP/40HQ) 630/1310/1650PCS



• Starter with optional easy start function



• Ergonomically designed throttle grip with user in mind

- Equipped with advanced air cooled 2-stroke engine.
- High quality piston to ensure greater performance and longer engine life.
- Lightweight bevel drive reduces weight for easy handling.

- Low fuel consumption.
- Primer bulb make starting easy in the most demanding conditions.
- Equipped with ergonomic handle and professional adjustable harness.



EURO 1

TB330

Matched Engine 1E36F-2
Displacement(CC) 32.7
Rated Power Output 0.90KW/1.2HP
Form Of Carburetor DIAPHRAGM
Mixed Fuel Ratio 25:1
Tank Capacity(L) 0.84
Engine Working Life(H) 120
Loading Qty (20GP/40GP/40HQ) 630/1310/1540PCS



EURO 1

TB430/520

Model TB430/TB520
Matched Engine 1E40F-5 / 1E44F-5
Displacement(CC) 42.7 / 51.7
Rated Power Output 1.25KW/1.7HP / 1.45KW/2.0HP
Form Of Carburetor DIAPHRAGM / DIAPHRAGM
Mixed Fuel Ratio 25:1 / 25:1
Tank Capacity(L) 1.0 / 1.0
Engine Working Life(H) 120 / 120
Loading Qty (20GP/40GP/40HQ) 630/1310/1540PCS / 630/1310/1540PCS






PROFESSIONAL TOOLS

J-SKY brush cutters deliver high performance with low fuel consumption and low emissions, combined with outstanding ergonomics. They have high blade speeds and optimally designed bevel gears for directional felling in different stands. Adjustable, anti vibration equipped handles enhance comfort and convenience during operation. **J-SKY** brush cutters, always offer advanced engine technology for you.



ZT261


Matched Engine 1E34F-2E
Displacement(CC) 25.4
Rated Power Output 0.65KW/0.9HP
Form Of Carburetor BUTTERFLY VALVE
Mixed Fuel Ratio FD 40:1
Tank Capacity(L) 0.55
Engine Working Life(H) 120
Loading Qty (20GP/40GP/40HQ) 630/1310/1650PCS




- Starter with optional easy start function



- Auto choke



- Full crank



- Ergonomically designed throttle grip with user in mind



NB43SEU/52SEU

Matched Engine	1E40F-5 / 1E44F-5
Displacement(CC)	42.7 / 51.7
Rated Power Output	1.35KW/1.8HP / 1.45KW/2.0HP
Form Of Carburetor	DIAPHRAGM / DIAPHRAGM
Mixed Fuel Ratio	FD40:1 / FD40:1
Tank Capacity(L)	0.65 / 0.65
Engine Working Life(H)	200 / 200
Loading Qty (20GP/40GP/40HQ)	610/1280/1500PCS 610/1280/1500PCS



- Starter with optional easy start function



- Ergonomically designed throttle grip with user in mind



- Innovative and stronger handle fixture to reduce vibration and weight



- Ergonomic design ,more comfortable for operator


Walk behind Trimmer

Easy To Handle


Designed for users demanding a brush cutter with high performance in its class and superior operating comfort.

NEW
PRODUCT


2020



- Unique design, more easier for operator



- Starter with optional easy start function



- Ergonomically designed throttle grip with user in mind



- Fuel efficiency

- Equipped with advanced air cooled 2-stroke engine. The foldable handles allow for easy transportation and storage, and the handles can also be adjusted to suit your height for increased comfort.
- Equipped with a durable nylon string cutting head which can cut through overgrown grass, brambles and weeds.
- Mounted on to large wheels for increased maneuverability and perfect balance.



Matched Engine 1E44F-5
 Displacement(CC) 51.7
 Rated Power Output 1.45KW/2.0HP
 Form Of Carburetor DIAPHRAGM
 Mixed Fuel Ratio FD 40:1
 Tank Capacity(L) 1.16
 Engine Working Life(H) 120/200
 Loading Qty (20GP/40GP/40HQ) 630/1310/1650Pcs

BG Series


Ideal For Mowing Difficult Terrains.

The weight is carried on the user's back for maximum comfort via a support frame.



BG-TU430/520


Matched Engine 1E40F-5 / 1E44F-5
Displacement(CC) 42.7 / 51.7
Rated Power Output 1.35KW/1.8HP / 1.45KW/2.0HP
Form Of Carburetor DIAPHRAGM / DIAPHRAGM
Mixed Fuel Ratio FD40:1 / FD40:1
Tank Capacity(L) 1.16 / 1.16
Engine Working Life(H) 120 / 120



- Starter with optional easy start function



- Operator can put tools in the bag, more convenient and save time.




- Unique design, more easier for operator



BG-TU331

Matched Engine 1E36F-2E
Displacement(CC) 32.7
Rated Power Output 0.90KW/1.2HP
Form Of Carburetor DIAPHRAGM
Mixed Fuel Ratio FD 40:1
Tank Capacity(L) 0.84
Engine Working Life(H) 120



BG430/520

Matched Engine 1E40F-5 / 1E44F-5
Displacement(CC) 42.7 / 51.7
Rated Power Output 1.35KW/1.8HP / 1.45KW/2.0HP
Form Of Carburetor DIAPHRAGM / DIAPHRAGM
Mixed Fuel Ratio FD 40:1 / FD 40:1
Tank Capacity(L) 1.16 / 1.16
Engine Working Life(H) 120 / 120
Loading Qty (20GP/40GP/40HQ) 370/780/910PCS






Multi-Function Tool




J-SKY multifunctional set offers great flexibility for keen gardeners with multi needs. Mowing lawn edges and fences, pruning trees and hedges, trimming bushes, no matter what the Job is, this set takes care of them all.



- Starter with optional easy start function



- Unique design ,reduce vibration, more comfortable for operator



- Ergonomic design ,more comfortable for operator



TU-MT261

Matched Engine 1E34F-2E
Displacement(CC) 25.4
Rated Power Output 0.65KW/0.9HP
Form Of Carburetor DIAPHRAGM
Mixed Fuel Ratio FD 40:1
Tank Capacity(L) 0.55
Engine Working Life(H) 120



DY430

Matched Engine 1E40F-5
Displacement(CC) 42.7
Rated Power Output 1.35KW/1.8HP
Form Of Carburetor DIAPHRAGM
Mixed Fuel Ratio FD 40:1
Tank Capacity(L) 1.16
Engine Working Life(H) 120
Loading Qty (20GP/40GP/40HQ) 450/920/1080Pcs



ZT-MT261

Matched Engine 1E34F-2E
Displacement(CC) 25.4
Rated Power Output 0.65KW/0.9HP
Form Of Carburetor BUTTERFLY VALVE
Mixed Fuel Ratio FD 40:1
Tank Capacity(L) 0.55
Engine Working Life(H) 120



TU-MT331

Matched Engine 1E36F-2E
Displacement(CC) 32.7
Rated Power Output 0.90KW/1.2HP
Form Of Carburetor DIAPHRAGM
Mixed Fuel Ratio FD 40:1
Tank Capacity(L) 0.84
Engine Working Life(H) 120



TU-MT430/520

Matched Engine 1E40F-5 / 1E44F-5
Displacement(CC) 42.7 / 51.7
Rated Power Output 1.35KW/1.8HP / 1.45KW/2.0HP
Form Of Carburetor DIAPHRAGM / DIAPHRAGM
Mixed Fuel Ratio FD 40:1 / FD40:1
Tank Capacity(L) 1.16 / 1.16
Engine Working Life(H) 120 / 120



DY431

Matched Engine 1E40F-5
Displacement(CC) 42.7
Rated Power Output 1.35KW/1.8HP
Form Of Carburetor DIAPHRAGM
Mixed Fuel Ratio FD40:1
Tank Capacity(L) 1.16
Engine Working Life(H) 120
Loading Qty (20GP/40GP/40HQ) 450/920/1080Pcs





Chain Saw

Ideal For Farm,Home Or Commercial Purposes

Tough, safe and easy to use, to guarantee a quality job in all circumstances.A range characterized by top quality, reliable performance, easy use and maintenance.The engine's low consumption and linear torque-speed

response ensure premium performance even during extended periods of continuous duty. All machines are equipped with the best safety devices.High power, low vibration.




- Well balanced body plus exceptionally low vibrations
- Chrome plated cylinder, forged and machined steel connecting rod and crank shaft, 2 needle bearings.
- Electronic ignition for high performance and long life.
- Automatic chain lubrication with adjustable oil pump.
- Easy access to air filter and spark plug .
- Side-mounted chain adjuster.

With exceptional performance and low fuel consumption, this powerful saw will impress any hardworking pro. The extremely low vibration and very long-life air filtration will definitely make your work easier.

OPTIONAL



- Easier and quicker to open




- Double layered air filter for better filtering



- Easier and more comfortable to open and close



- Thoughtfully designed to be lighter and compact



- No more hot start problem



- New design muffler, reduce sound significantly



YD3810/4110

Matched Engine YD3810/YD4110
Displacement(CC) 37.2 / 40.1
Rated Power Output 1.2KW/1.6HP / 1.4KW/1.9HP
Mixed Fuel Ratio FD 40:1 / FD40:1
Fuel Tank Capacity(L) 0.31 / 0.31
Oil Tank Capacity(L) 0.2 / 0.2
Engine Working Life(H) 120 / 120
Guide Bar Size(INCH) 12"/14"/16" / 12"/14"/16"
Loading Qty (20GP/40GP/40HQ) 750/1560/1830Pcs / 750/1560/1830Pcs

Chain Saw

Tough Saws For Efficient Forestry Work



- Well balanced body plus exceptionally low vibrations
- Electronic ignition for high performance and long life.
- Easy access to air filter and spark plug .
- Chrome plated cylinder, forged and machined steel connecting rod and crank shaft, 2 needle bearings.
- Automatic chain lubrication with adjustable oil pump.
- Side-mounted chain adjuster.



YD25

Displacement(CC) 25
Rated Power Output 1.10KW/1.5HP
Mixed Fuel Ratio 25:1
Start assist system Easy Start
Fuel Tank Capacity(L) 0.23
Oil Tank Capacity(L) 0.16
Engine Working Life(H) 120
Guide Bar Size(INCH) 8"/10"/12"



YD4510/YD5210

Displacement(CC) 45 / 49.3
Rated Power Output 1.8KW/2.4HP / 2.0KW/2.7HP
Mixed Fuel Ratio 25:1 / 25:1
Start assist system Easy Start / Easy Start
Fuel Tank Capacity(L) 0.55 / 0.55
Oil Tank Capacity(L) 0.26 / 0.26
Engine Working Life(H) 120 / 120
Guide Bar Size(INCH) 16"/18"/20" / 16"/18"/20"



YD5810

Displacement(CC) 54.6
Rated Power Output 2.5KW/2.8HP
Mixed Fuel Ratio 25:1
Start assist system Easy Start
Fuel Tank Capacity(L) 0.55
Oil Tank Capacity(L) 0.26
Engine Working Life(H) 120
Guide Bar Size(INCH) 20"/22"



YD3800/4100

Matched Engine YD3800/YD4100
Displacement(CC) 37.2 / 40.1
Rated Power Output 1.2KW/1.6HP / 1.4KW/1.9HP
Mixed Fuel Ratio 25:1 / 25:1
Fuel Tank Capacity(L) 0.31 / 0.31
Oil Tank Capacity(L) 0.21 / 0.21
Engine Working Life(H) 120 / 120
Guide Bar Size(INCH) 12"/14"/16" / 12"/14"/16"
Loading Qty (20GP/40GP/40HQ) 750/1560/1830pcs / 750/1560/1830pcs



YD58

Matched Engine YD58
Displacement(CC) 54.6
Rated Power Output 2.5KW/3.4HP
Mixed Fuel Ratio 25:1
Fuel Tank Capacity(L) 0.55
Oil Tank Capacity(L) 0.26
Engine Working Life(H) 120
Guide Bar Size(INCH) 20"/22"
Loading Qty (20GP/40GP/40HQ) 750/1560/1830pcs




Sprayer

Greater Results With **J-SKY** Sprayers.


The dependable **J-SKY** sprayers features safety check valves to prevent leaks, a re-circulating agitator to keep chemicals mixed and an ergonomic shoulder strap assembly for improved operator comfort.



- Backpack Support




- Starter with optional easy start function



- 4 T lock nut self design and produce, lock more firm and not easy to loosen



- Copper pump



SP987

Matched Engine 1E34F-2E
 Displacement(CC) 25.4
 Rated Power Output 0.65KW/0.9HP
 Mixed Fuel Ratio 25:1
 Idle speed (RPM) 3000 ± 200
 Engine Working Life(H) 120

Form Of Carburetor BUTTERFLY VALVE
 Fuel Tank Capacity(L) 0.55
 Tank Capacity(L) 15/25
 Working pressure(MPa) 1.5-2.5
 Specified output rate(L/Min) ≥6
 Loading Qty (20GP/40GP/40HQ) 320/665/780pcs



SP767

Matched Engine 1E33F
 Displacement(CC) 25.6
 Rated Power Output 0.70KW/1.0HP
 Mixed Fuel Ratio 25:1
 Idle speed (RPM) 3000 ± 200
 Engine Working Life(H) 120

Form Of Carburetor DIAPHRAGM
 Fuel Tank Capacity(L) 0.9
 Tank Capacity(L) 24
 Working pressure(MPa) 1.5-2.5
 Specified output rate(L/Min) ≥6
 Loading Qty (20GP/40GP/40HQ) 320/665/780pcs



SP768

Matched Engine 1E34F
 Displacement(CC) 25.4
 Rated Power Output 0.70KW/1.0HP
 Mixed Fuel Ratio 25:1
 Idle speed (RPM) 3000 ± 200
 Engine Working Life(H) 120

Form Of Carburetor DIAPHRAGM
 Fuel Tank Capacity(L) 0.6
 Tank Capacity(L) 24
 Working pressure(MPa) 1.5-2.5
 Specified output rate(L/Min) ≥6
 Loading Qty (20GP/40GP/40HQ) 320/665/780pcs




SP769

Matched Engine 1E34F
 Displacement(CC) 25.4
 Rated Power Output 0.70KW/1.0HP
 Mixed Fuel Ratio 25:1
 Idle speed (RPM) 3000 ± 200
 Engine Working Life(H) 120


Form Of Carburetor DIAPHRAGM
 Fuel Tank Capacity(L) 0.6
 Tank Capacity(L) 16
 Working pressure(MPa) 1.5-2.5
 Specified output rate(L/Min) ≥6
 Loading Qty (20GP/40GP/40HQ) 320/665/780pcs






3WF-808

Matched Engine	1E40F-5P
Displacement(CC)	42.7
Power(kw/r/min)	1.25/7000
Range(m)	≥12
Fan Rotation Speed(r/min)	6500
N.W/G.W(kg)	10/13.5
Packing(mm)	550x390x685
Fuel tank(ml)	2100
Tank Capacity(L)	14
20# Container	220
40HQ Container	535



3WF-3A

Matched Engine	1E40FP-3Z
Displacement(cc)	41.5
Power(kw/r/min)	2.13/7500
Range(m)	≥12
Fan Rotation Speed(r/min)	7500
N.W/G.W(kg)	11/14
Packing(mm)	490x410x770
Fuel tank(ml)	1400
Tank Capacity(L)	20
20# Container	195
40HQ Container	450



3WF-3S

Engine	140FA
Power(kw/r/min)	1.0/6500
Displacement(cc)	37.7
Range(m)	≥12
Fan Rotation Speed(r/min)	6500
N.W/G.W(kg)	10.5/13.5
Packing(mm)	520x440x770
Fuel tank(ml)	1400
Tank Capacity(L)	20
20# Container	160
40HQ Container	385



Portable Spray

Greater Results With **J-SKY** Portable Sprayers.



JS6S




Matched Engine	1E34F-2E
Displacement(CC)	25.4
Rated Power Output	0.65KW/0.9HP
Mixed Fuel Ratio	25:1
Idle speed (RPM)	3000 ± 200
Engine Working Life(H)	120

Form Of Carburetor	BUTTERFLY VALVE
Capacity of fuel tank (L)	0.55
Working pressure(MPa)	1.5-3.0
Max. Pressure (MPa)	3.5
Max. Working Flowrate (LPM)	7
Loading Qty (20GP/40GP/40HQ)	320/665/780pcs

Water Pump

Full Die Cast Aluminum Pump Case Light Weight, Durable

Designed and manufactured to perform in the most adverse conditions, **J-SKY** water pump features an all-die-cast aluminum pump housing for light weight and durability. A quality pump delivers high flow output for professional-grade applications.

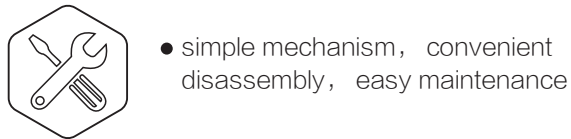


QG40-30

Matched Engine 1E47.5F
Displacement(CC) 62
Lift(M) 40
Suction(M) 8
Flow(M³/H) 19
Water Outlet Diameter(MM) 40
Engine Working Life(H) 120
Pump Type NON SELF PRIMING
Loading Qty (20GP/40GP/40HQ) 770/1600/1870pcs



SWP430

Matched Engine 1E40F-5
Rated power output 1.35kw/1.8HP
Flow(m³/h) 14
Lift(M) 25
Range(M) 11
Water Inlet Diameter(in) 1.5
Water Outlet Diameter(in) 1.5
Engine Working Life(H) 120
Loading Qty (20GP/40GP/40HQ) 700/1450/1700pcs

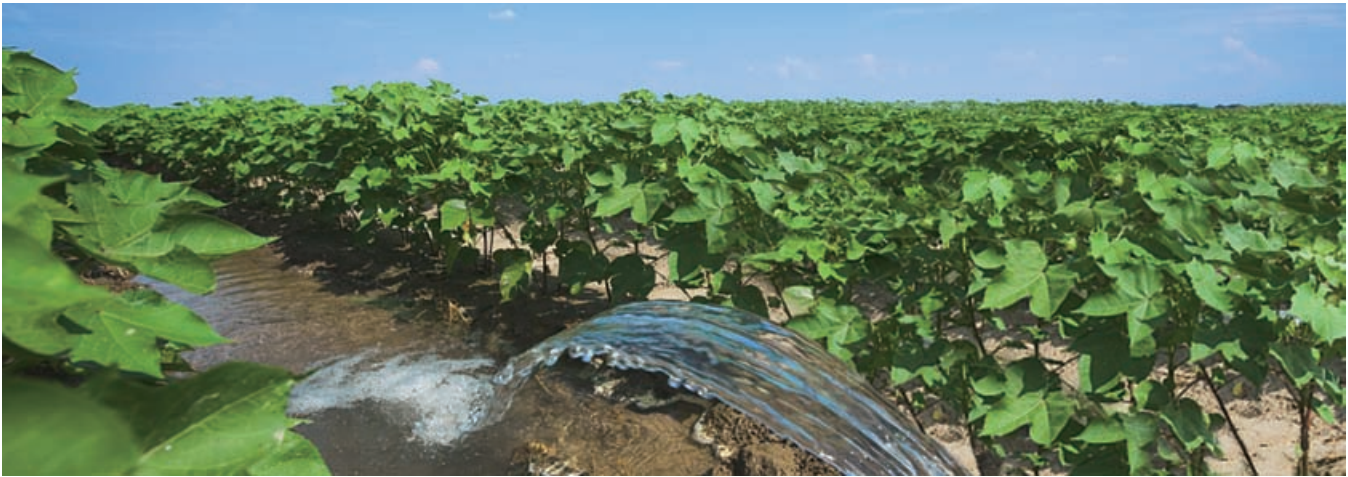

QGZ40-30

Matched Engine 1E40F-6
Displacement(CC) 40.2
Lift(M) 35
Suction(M) 8
Flow(M³/H) 15
Engine Working Life(H) 120
Pump Type SELF-PRIMING CENTRIFUGAL
Water Outlet Diameter(MM) 40
Stipulation Suction Time(S) ≤30
Loading Qty (20GP/40GP/40HQ) 630/1300/1530pcs



QGZ40-30A

Matched Engine 1E40F-5
Displacement(CC) 42.7
Lift(M) 35
Suction(M) 8
Flow(M³/H) 8
Engine Working Life(H) 120
Water Outlet Diameter(MM) 40
Stipulation Suction Time(S) ≤30
Pump Type SELF-PRIMING CENTRIFUGAL
Loading Qty (20GP/40GP/40HQ) 700/1450/1700pcs



QGZ25-30B

Matched Engine 1E40F-5
Displacement(CC) 42.7
Lift(M) 30
Suction(M) 8
Flow(M³/H) 8
Water Outlet Diameter(MM) 25
Stipulation Suction Time(S) ≤30
Engine Working Life(H) 120
Pump Type SELF-PRIMING CENTRIFUGAL
Loading Qty (20GP/40GP/40HQ) 700/1450/1700pcs



Hedge Trimmer

Greater Results With *J-SKY* Trimmers.

Designed for professionals, the *J-SKY* hedge trimmer are exceptionally well-balanced and rugged double-sided hedge trimmer. The robust design leads to long product life,even under the most demanding landscaping conditions.



- Starter with optional easy start function



- Push button



- Laser cut blade, sharp edge, high precision



- Adjustable 5 positions rotary handle



- The eccentric gear with hollowed-out design is more favorable for lubrication and heat dissipation; assembly 2 bearings in the eccentric gear, run more stable and smoothly, longer lift time;

EURO 1

HT230C

Matched Engine 1E32F
Displacement(CC) 22.5
Rated Power Output 0.65KW/0.9HP
Idle speed (RPM) 3000±200
Mixed Fuel Ratio 25:1
Blade Type DOUBLE
Blade Length(MM) 600
Tank Capacity(L) 0.6
Engine Working Life(H) 120
Loading Qty (20GP/40GP/40HQ) 747/1549/1816pcs



HT262

Matched Engine 1E34F-3EA
Displacement(CC) 25.4
Rated Power Output 0.75KW/1.02HP
Idle speed (RPM) 3000±200
Mixed Fuel Ratio FD40:1
Start assist system Easy Start
Blade Type DOUBLE
Blade Length(MM) 450/550
Tank Capacity(L) 0.32
Engine Working Life(H) 120

Earth Auger / Cultivator



State-of-the-art 49 cc Engine Makes The Earth/ice Auger A Must For Any Digging Operation.

Designed and manufactured to perform in the most adverse conditions, **J-SKY** WA44F-5 earth / ice auger features an all-die-cast aluminum housing for light weight and durability.




AG52

Matched Engine 1E44F-5
Displacement(CC) 51.7
Rated Power Output 1.45KW/2.0HP
Mixed Fuel Ratio FD 40:1
Drill Diameter(MM) 100/150/200/300
Tank Capacity(L) 1.2
Loading Qty (20GP/40GP/40HQ) 295/612/707pcs



WA44F-5

Matched Engine 1E44F-5
Displacement(CC) 51.7
Rated Power Output 1.45KW/2.0HP
Mixed Fuel Ratio FD 40:1
Drill Diameter(MM) 100/150/200/300
Tank Capacity(L) 1.2
Loading Qty (20GP/40GP/40HQ) 295/612/707pcs



TR430

Matched Engine 1E40F-5
Displacement(CC) 42.7
Rated Power Output 1.35KW/1.8HP
Form Of Carburetor DIAPHRAGM
Mixed Fuel Ratio FD 40:1
Tilling Width(CM) 30
Tilling Depth(CM) 30
Fuel Tank Capacity(L) 0.9



Blower / Vacuum


A Cleaner Yard With **J-SKY** Blower

Tough, safe and easy to use, to guarantee a quality job in all circumstances. A range characterized by top quality, reliable performance, easy use and maintenance. The engine's low consumption and linear torque-speed response ensure premium performance even during extended periods of continuous duty. All machines are equipped with the best safety devices. High power, low vibration.



EBV260

Matched Engine 1E34FC
 Engine displacement(CC) 25.4
 Power(kw/r/min) 0.75/7500
 Dry Weight(kg) 5.7
 Fuel tank Capacity(ml) 400
 Blowing Air Force(N) 12.0
 Air Volume(m³/h) 576
 Max Air Speed(m/sec) 81.7
 Nozzle Type A: Vacuum / B: Flat straight
 Package Dimension(mm) 400x320x410
 20#Container 650
 40HQ Container 1550



Featuring a professional grade petrol engine for powerful performance whether you're blowing, vacuuming or shredding.



Quickly and efficiently remove leaves and other debris. It also crushed the material, reducing its volume by 10:1.



Convert from Shred to blower in seconds by simply removing the shredding bag and changing the pipes.



EB260

Matched Engine 1E34FC
 Displacement(CC) 25.4
 Power(kw/r/min) 0.75/7500
 N.W/G.W(kg) 4.5/6
 Fuel tank Capacity(ml) 400
 Air outlet flow(m³/s) 0.17
 Air outlet speed(m/s) 68
 Package Dimension(mm) 355x285x395
 20#Container 730
 40HQ Container 1700



Blower Backpack


Featuring a professional grade petrol engine for exceptional air volume and speed.

professional grade petrol engine for exceptional air volume and speed. It features anti vibration technology as well as a ventilated back pad for operator comfort and an easy access heavy-duty air filter to ensure dust and debris do not enter the engine.




EB808

Matched Engine 1E40F-5B
Displacement(CC) 42.7
Power(kw/r/min) 1.25/7000
N.W/G.W(kg) 8/9
Fuel tank Capacity(ml) 1000
Air outlet flow(m³/s) 0.2
Air outlet speed(m/s) 70
Package Dimension(mm) 430x390x460
20#Container 390
40Hq Container 900



EB808A

Matched Engine 1E40F-5B
Displacement (CC) 42.7
Power(kw/r/min) 1.25/7000
N.W/G.W(kg) 8.5/10
Fuel tank Capacity(ml) 1300
Air outlet flow(m³/s) 0.2
Air outlet speed(m/s) 70
Package Dimension(mm) 430x390x460
20#Container 390
40Hq Container 900



EB8650

Matched Engine 1E48FP
Displacement(CC) 63.3
Power(kw/r/min) 2.6/7000
N.W/G.W(kg) 9.1/10.5
Fuel tank Capacity(ml) 1800
Air outlet flow(m³/s) 0.24
Air outlet speed(m/s) 78
Package Dimension(mm) 510x380x575
20#Container 255
40Hq Container 615



EB8890

Matched Engine 1E51F
Displacement(CC) 75.6
Power(kw/r/min) 3.1/7000
N.W/G.W(kg) 10.2/11.5
Fuel tank Capacity(ml) 2200
Air outlet flow(m³/s) 0.3
Air outlet speed(m/s) 80
Package Dimension(mm) 550x420x605
20#Container 205
40Hq Container 490



EB9900

Matched Engine 1E51F
Displacement(CC) 75.6
Power(kw/r/min) 2.2/7000
N.W/G.W(kg) 9.1/10.5
Fuel tank Capacity(ml) 1900
Air outlet flow(m³/s) 0.28
Air outlet speed(m/s) 72
Package Dimension(mm) 465x400x540
20#Container 280
40Hq Container 680



EB9950

Matched Engine 1E51F
Displacement(CC) 75.6
Power(kw/r/min) 2.2/7000
N.W/G.W(kg) 9.1/10.5
Fuel tank Capacity(ml) 1900
Air outlet flow(m³/s) 0.28
Air outlet speed(m/s) 72
Package Dimension(mm) 500x420x590
20#Container 230
40Hq Container 550

